




- 3-CCT (3000K/4000K/5700K) selectable
- Switch on the back to select CCT
- 10W, 950-1050lm
- Equipped with 2-pin Australia AS3112 plug, ready to plug-in
- Triac dimmable
- IC-4 insulation rated, can be covered by insulating material during insulation
- IP54 water proof for wet location installation
- 100° beam angle
- Lifetime 40,000 hrs

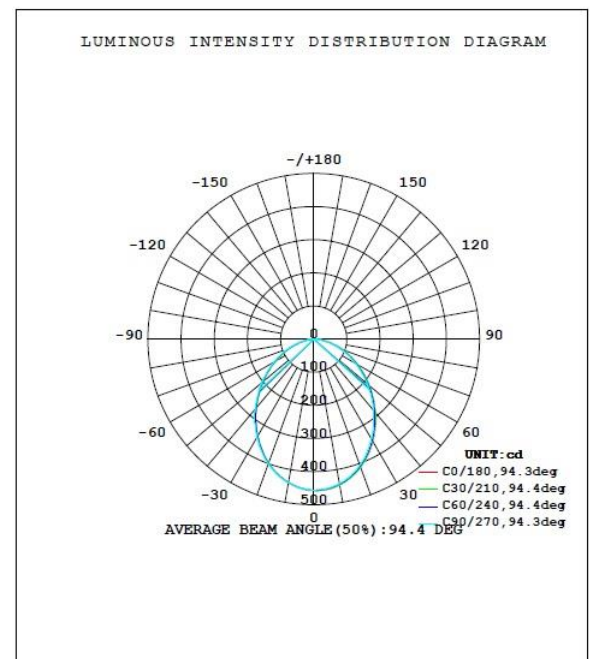

Order Code	65579
General Data	
Lamp Socket	Integrated downlight
Design	PC diffuser
Geometric Data	
Height (mm)	61mm (including LED driver)
Diameter (mm)	115mm
Weight (g)	205g
Electric Data	
Wattage	10W
Voltage	220-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
Photometric Data	
Total Luminous Flux (lm)	950-1050lm
90° cone Luminous Flux (lm)	N/A
CRI	≥80
CCT	3000K/4000K/5700K
Luminous Intensity (cd)	450Cd (measured at 4000K)
Beam Angle (°)	100°
Lifetime	40,000 hrs
Equivalent to (W)	75W incandescent downlight

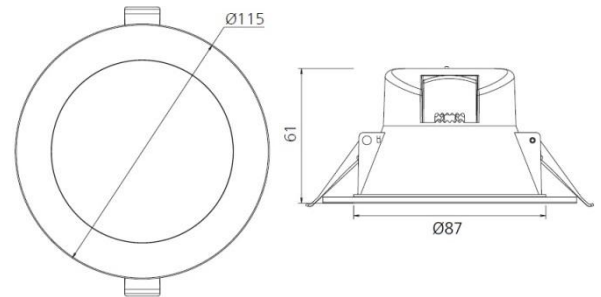

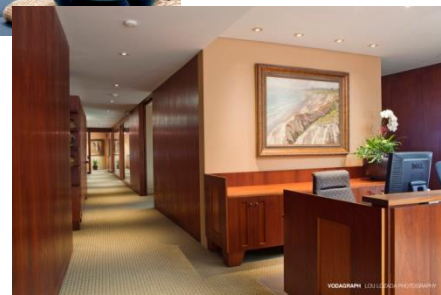

Order Code

65579

Product Description

Verbatim LED recessed downlight (flat diffuser) 10W CCT selectable 950-1050lm with AU plug 90mm cut-hole

Technical Packaging Details

Giftbox Barcode	6943760255799
Inner Carton Barcode	16943760255796
Outer Carton Barcode	26943760255793
Pack Dimensions (LxWxH)	125 mm x 125 mm x 70 mm
Pack Weight	270g
Carton Qty (Shipping Unit)	30
Carton Dimensions (LxWxH)	390 mm x 265 mm x 275 mm
Cartons/Layer	2
Layers/Pallet	12
Units/Pallet	720