

- Ready for surface mounting out of the box
- Comes with 1.2m cable and Plug
- Double insulated
- 3600lm
- 115° beam angle
- 4000K CCT
- L70 lifetime >54000hrs
- Indoor use only




← **1200mm** →



↓ **27.7mm**
← **62.7mm** →

Order Code	66672
General Data	
Plug	2 pin AU Plug
Design	N/A
Geometric Data	
Length (mm)	1200mm
Width x Height (mm)	62.7x 27.7mm
Weight (g)	430g
Electric Data	
Wattage	36W
Voltage	200-240Vac
Power Factor	0.9
Operating Frequency	50-60Hz
Photometric Data	
Total Luminous Flux (lm)	3600lm
CRI	> 80
CCT	4000K – Cool-white
Luminous Intensity (cd)	N/A
Beam Angle (°)	115°
Lifetime(L70)	>54000 hrs
Operating Temperature	-40-40°C

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

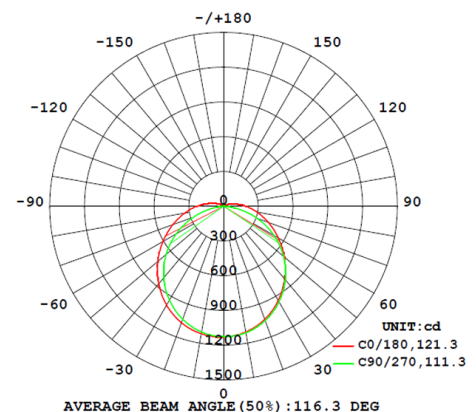



Order Code	66672
Product Description	Verbatim Slim LED Batten 36W 1.2m PC diffusion Aluminum PCB no flicker w CnP

Technical Packaging Details

Giftbox Barcode	4895117966723
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117966727
Pack Dimensions (LxWxH)	1265x68x44mmmm
Pack Weight	TBC
Carton Qty (Shipping Unit)	30
Carton Dimensions (LxWxH)	TBCmm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC