



## led lighting product catalogue

2021

---



## contents

silver XS .....	3
silver S .....	4
silver S TW.....	5
silver M .....	6
silver M TW.....	7
vue micro .....	8
smooth S .....	9
smooth M .....	10
smooth L .....	11
preneo .....	12
ario IP65 .....	13
boxy .....	14
teso basic 15W.....	15
teso basic 25W.....	16
teso pro .....	17
surface track accessories.....	18
recessed track accessories.....	20
artere .....	22
ligne-micro.....	24

# silver XS



silver series



architectural lighting requires the right luminaire. Highlighting and accenting with multiple sources rather than just flooding an area with light. The silver XS has a subtle aperture to minimise visual impact, and with an adjustable specular aluminium reflector and a range of beam angles to create the perfect effect.

## specifications

system wattage	7W
CCT	2700K, 3000K, 3500K, 4000K
luminaire output	505lm - 562lm
beam angles	20°, 35°, 55°
CRI	90
Macadam	3 SDCM
control	on/off, triac, 1-10V, DALI, Casambi
cutout	Ø46mm for 5-25mm ceiling thickness
lifetime	50,000hrs
build	die-cast aluminium & specular aluminium reflector
IP rating	IP20
warranty	5 years
accessories	black or white trim honeycomb filter frosted diffuser

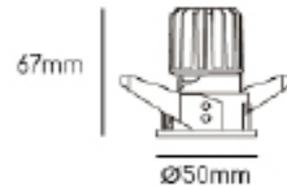

## product code

<b>FV</b>	-	<b>SXS</b>	-	<b>7</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>R</b>	
product group	vue	group destination	silver XS	wattage	7W	dimmable	non-dim	beam angle	20°	cct	2700K	fixture colour	white	mounting	recessed
<b>FV</b>	vue	<b>SXS</b>	silver XS	<b>7</b>	7W	<b>Do</b>	non-dim	<b>20</b>	20°	<b>27</b>	2700K	<b>W</b>	white	<b>R</b>	recessed
						<b>D1</b>	1-10V	<b>35</b>	35°	<b>30</b>	3000K	<b>B</b>	black		
						<b>D2</b>	TRIAC	<b>55</b>	55°	<b>35</b>	3500K				
						<b>DD</b>	DALI			<b>40</b>	4000K				
						<b>CS</b>	Casambi								



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# silver S


## silver series




architectural lighting requires the right luminaire. Highlighting and accenting with multiple sources rather than just flooding an area with light. The silver S has an adjustable specular aluminium reflector and a range of beam angles and washers to create the perfect effect. The range also includes a square trim and trimless options in both square and round trim.

### specifications

<b>system wattage</b>	15.5W	
<b>CCT</b>	2700K, 3000K, 3500K, 4000K	
<b>luminaire output</b>	1103lm - 1229lm	
<b>beam angles</b>	25°, 38°, 55°, wallwash 16° at 8W system wattage	
<b>CRI</b>	90	
<b>Macadam</b>	3 SDCM	
<b>control</b>	on/off, triac, 1-10V, DALI, Casambi	
<b>cutout</b>	Ø63mm for 5-25mm ceiling thickness	
<b>lifetime</b>	50,000hrs	
<b>build</b>	die-cast aluminium & specular aluminium reflector	
<b>IP rating</b>	IP20	
<b>warranty</b>	5 years	
<b>accessories</b>	honeycomb filter clear lens frosted diffuser	<b>options</b> black or white trim square trimless specular, frosted or gold reflector



Cut hole: ø63

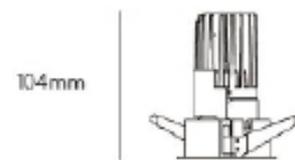

104mm

Ø70mm



### product code

<b>FV</b>	-	<b>SS</b>	-	<b>15</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SS</b> silver S		<b>15</b> 15.5W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>25</b> 25° <b>35</b> 38° <b>55</b> 55° <b>WW</b> wallwash		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# silver S TW


silver series




architectural lighting requires the right luminaire. Highlighting and accenting with multiple sources rather than just flooding an area with light. The silver S TW has an adjustable specular aluminium reflector and a range of beam angles and washers to create the perfect effect. The range also includes a square trim and trimless options in both square and round trim, and all with the flexibility to adjust the colour temperature between 2700K and 6500K.

## specifications

<b>system wattage</b>	8.7W		
<b>CCT</b>	tuneable white - 2700K - 6500K		
<b>luminaire output</b>	572lm - 679lm		
<b>beam angles</b>	16°, 25°, 38°, 55°, wallwash		
<b>CRI</b>	90		
<b>Macadam</b>	3 SDCM		
<b>control</b>	DALI, Casambi		
<b>cutout</b>	Ø63mm for 5-25mm ceiling thickness		
<b>lifetime</b>	50,000hrs		
<b>build</b>	die-cast aluminium & specular aluminium reflector		
<b>IP rating</b>	IP20		
<b>warranty</b>	5 years		
<b>accessories</b>	black or white trim honeycomb filter clear lens frosted diffuser	<b>options</b>	black or white trim square trimless specular, frosted or gold reflector



\*Cuthole: ø63

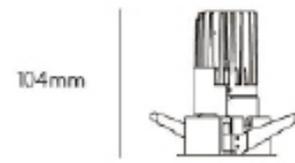

Ø70mm



## product code

<b>FV</b>	-	<b>SSTW</b>	-	<b>8</b>	-	<b>x</b>	-	<b>x</b>	-	<b>TW</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SSTW</b> silver S TW		<b>8</b> 8.7W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>16</b> 16° <b>25</b> 25° <b>38</b> 38° <b>55</b> 55° <b>WW</b> wallwash		<b>TW</b> tuneable white		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# silver M


silver series




architectural lighting requires the right luminaire. Highlighting and accenting with multiple sources rather than just flooding an area with light. The silver S has an adjustable specular aluminium reflector and a range of beam angles and washers to create the perfect effect. The range also includes a square trim and trimless options in both square and round trim.

## specifications

<b>system wattage</b>	31W		
<b>CCT</b>	2700K, 3000K, 3500K, 4000K		
<b>luminaire output</b>	2375lm - 2646lm		
<b>beam angles</b>	16°, 25°, 38°, 55°, wallwash		
<b>CRI</b>	90		
<b>Macadam</b>	3 SDCM		
<b>control</b>	on/off, triac, 1-10V, DALI, Casambi		
<b>cutout</b>	Ø103mm for 5-25mm ceiling thickness		
<b>lifetime</b>	50,000hrs		
<b>build</b>	die-cast aluminium & specular aluminium reflector		
<b>IP rating</b>	IP20		
<b>warranty</b>	5 years		
<b>accessories</b>	honeycomb filter clear lens frosted diffuser	<b>options</b>	black or white trim square trimless specular, frosted or gold reflector



\*Cut hole : ø103

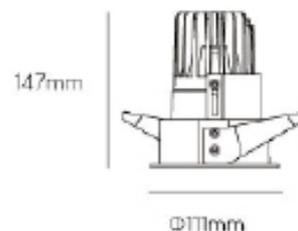

## product code

<b>FV</b>	-	<b>SM</b>	-	<b>31</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SM</b> silver M		<b>31</b> 31W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>16</b> 16° <b>25</b> 25° <b>38</b> 38° <b>55</b> 55° <b>WW</b> wallwash		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# silver M TW


silver series




architectural lighting requires the right luminaire. Highlighting and accenting with multiple sources rather than just flooding an area with light. The silver S TW has an adjustable specular aluminium reflector and a range of beam angles and washers to create the perfect effect. The range also includes a square trim and trimless options in both square and round trim, and all with the flexibility to adjust the colour temperature between 2700K and 6500K.

## specifications

<b>system wattage</b>	19.5W		
<b>CCT</b>	tuneable white - 2700K - 6500K		
<b>luminaire output</b>	1543lm - 1845lm		
<b>beam angles</b>	16°, 25°, 38°, 55°, wallwash		
<b>CRI</b>	90		
<b>Macadam</b>	3 SDCM		
<b>control</b>	DALI, Casambi		
<b>cutout</b>	Ø103mm for 5-25mm ceiling thickness		
<b>lifetime</b>	50,000hrs		
<b>build</b>	die-cast aluminium & specular aluminium reflector		
<b>IP rating</b>	IP20		
<b>warranty</b>	5 years		
<b>accessories</b>	honeycomb filter clear lens frosted diffuser	<b>options</b>	black or white trim square trimless specular, frosted or gold reflector



\*Cuthole : ø103

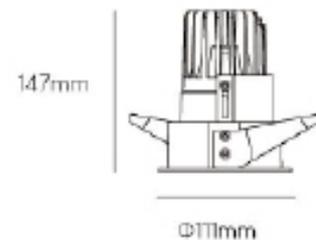

## product code

<b>FV</b>	-	<b>SMTW</b>	-	<b>19</b>	-	<b>x</b>	-	<b>x</b>	-	<b>TW</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SMTW</b> silver M TW		<b>19</b> 19.5W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>16</b> 16° <b>25</b> 25° <b>38</b> 38° <b>55</b> 55° <b>WW</b> wallwash		<b>TW</b> tuneable white		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# vue micro





## vue series



the vue micro range is suitable for residential, retail or commercial projects. Tiny 33mm pin points of light that are discrete yet effective, with options from 15° up to 40°, and a wall-washer reflector. The Vue Micro ELG 7W has a deep-set light source with a black reflector to eliminate glare and provide a tilt of up to 25°

### specifications

<b>system wattage</b>	2W, 6W, 8W	
<b>CCT</b>	2700K, 3000K, 3500K, 4000K	
<b>luminaire output</b>	213lm up to 615lm	
<b>beam angles</b>	15°, 30°, 40°, wall-wash	
<b>CRI</b>	>90	
<b>Macadam</b>	3 SDCM	
<b>control</b>	non-dim, Triac, DALI, Casambi	
<b>cutout</b>	Ø30mm	
<b>lifetime</b>	50,000hrs	
<b>build</b>	die-cast aluminium, reflector or lens	
<b>IP rating</b>	IP20	
<b>warranty</b>	5 years	
<b>colours</b>	black and white	
<b>accessories</b>	honeycomb filter clear lens frosted lens	<b>options</b> extra low glare with tilt

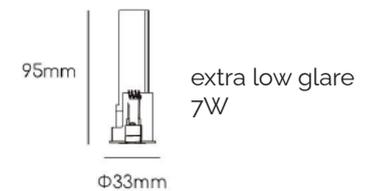

### product code

<b>FV</b>	-	<b>M</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>X</b>	-	<b>R</b>
product group		group destination		wattage		dimmmable		beam angle		cct		fixture colour		mounting
<b>FV</b>	Vue	<b>M</b>	micro	<b>2</b> 2W <b>6</b> 6W <b>8</b> 8W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>WW</b> wallwash		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# smooth S


## smooth series



a dark-light effect can create a soft and warm environment, and a curved edge transitions from light to dark gently. The overall effect being to draw the eye to the lit area or object. The Smooth range of architectural luminaires aims to provide the designer with the tools to create the perfect environment to connect with the end user.

### specifications

<b>system wattage</b>	4W, 6W, or 8W
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>luminaire output</b>	380lm - 770lm
<b>beam angles</b>	15°, 24°, 38°
<b>CRI</b>	90
<b>Macadam</b>	3 SDCM
<b>control</b>	on/off, triac, 1-10V, DALI, Casambi
<b>cutout</b>	Ø40mm, for 5-25mm ceiling thickness
<b>lifetime</b>	50,000hrs
<b>build</b>	die-cast aluminium
<b>IP rating</b>	IP20
<b>warranty</b>	5 years
<b>accessories</b>	honeycomb filter <b>options</b> black or white trim clear lens frosted diffuser

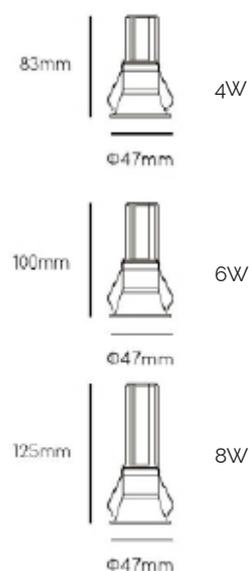

- HONEYCOMB
- CLEARLENS
- FROSTLENS



### product code

<b>FV</b>	-	<b>SMS</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b>	vue	<b>SMS</b>	smooth S	<b>4</b> 4W <b>6</b> 6W <b>8</b> 8W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>15</b> 15° <b>24</b> 24° <b>38</b> 38°		<b>27</b> 2700K <b>30</b> 3000K <b>40</b> 4000K <b>50</b> 5000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# smooth M




## smooth series



a dark-light effect can create a soft and warm environment, and a curved edge transitions from light to dark gently. The overall effect being to draw the eye to the lit area or object. The Smooth range of architectural luminaires aims to provide the designer with the tools to create the perfect environment to connect with the end user. Smooth is complimented with medium to large wattages and adjustable options.

### specifications

<b>system wattage</b>	16W	
<b>CCT</b>	2700K, 3000K, 3500K, 4000K	
<b>luminaire output</b>	1573lm up to 1663lm	
<b>beam angles</b>	15°, 25°, 40°, 60°	
<b>CRI</b>	90	
<b>Macadam</b>	3 SDCM	
<b>control</b>	on/off, triac, 1-10V, DALI, Casambi	
<b>cutout</b>	Ø78mm for fixed Ø92mm for adjustable	
<b>lifetime</b>	50,000hrs	
<b>build</b>	die-cast aluminium & specular aluminium reflector	
<b>IP rating</b>	IP20/IP44	
<b>warranty</b>	5 years	
<b>accessories</b>	honeycomb filter clear lens frosted diffuser	<b>options</b> black or white trim

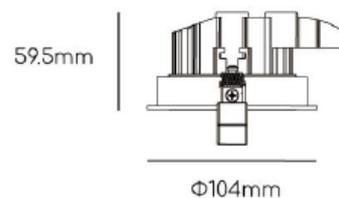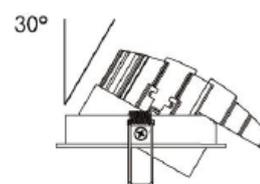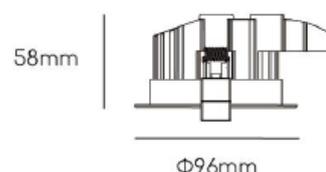

### product code

<b>FV</b>	-	<b>SMM</b>	-	<b>16</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SMM</b> smooth M		<b>16</b> 16W		<b>Do</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# smooth L


## smooth series



a dark-light effect can create a soft and warm environment, and a curved edge transitions from light to dark gently. The overall effect being to draw the eye to the lit area or object. The Smooth range of architectural luminaires aims to provide the designer with the tools to create the perfect environment to connect with the end user. Smooth is complimented with medium to large wattages and adjustable options.

### specifications

<b>system wattage</b>	33W
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>luminaire output</b>	3148lm up to 3322lm
<b>beam angles</b>	15°, 30°, 60°
<b>CRI</b>	90
<b>Macadam</b>	3 SDCM
<b>control</b>	on/off, 1-10V, DALI, Casambi
<b>cutout</b>	Ø104mm
<b>lifetime</b>	50,000hrs
<b>build</b>	die-cast aluminium & specular aluminium reflector
<b>IP rating</b>	IP20/IP44
<b>warranty</b>	5 years
<b>accessories</b>	honeycomb filter <b>options</b> black or white trim clear lens frosted diffuser

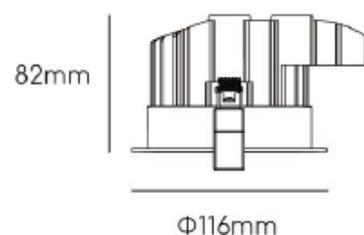

### product code

<b>FV</b>	-	<b>SML</b>	-	<b>33</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>SML</b> smooth L		<b>33</b> 33W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# preneo



## downlight



a high wattage solution suitable for high ceilings in open areas. A specular aluminium reflector minimises glare and the high CRI and tight colour consistency provides a maintained high quality light throughout the lifetime of the project.

### specifications

<b>system wattage</b>	34W, 51W, 85W	
<b>CCT</b>	2700K, 3000K, 3500K, 4000K	
<b>luminaire output</b>	3148lm up to 7938lm	
<b>beam angles</b>	40°, 60°	
<b>CRI</b>	90	
<b>Macadam</b>	3 SDCM	
<b>control</b>	non-dim, 1-10V, DALI, Casambi	
<b>cutout</b>	Ø143mm or Ø183mm	
<b>lifetime</b>	50,000hrs	
<b>build</b>	die-cast aluminium, alu reflector	
<b>IP rating</b>	IP20/IP44	
<b>warranty</b>	5 years	
<b>accessories</b>	honeycomb filter clear lens frosted diffuser	<b>options</b> black or white trim

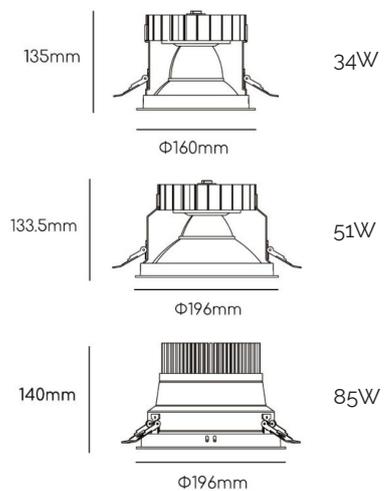

### product code

<b>FV</b>	-	<b>P</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>R</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FV</b> vue		<b>P</b> preneo		<b>34</b> 34W <b>51</b> 51W <b>85</b> 85W		<b>Do</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>40</b> 40° <b>60</b> 60°		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>R</b> recessed



**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au



# ario IP65

downlight




the ario IP65 is an architectural revelation as an exterior IP-rated downlights that does not look like an industrial light. Medium sized and IP65 from top and bottom, the Ario is bug-resistant and attractive. The use of a multi-angled reflector reduces glare and night-blindness by hiding the direct view of the light source.



## specifications

system wattage	25W
CCT	3000K, 4000K
luminaire output	up to 2030Lm
beam angles	50°
CRI	Ra80
control	non-dim, TRIAC, DALI
cutout	120mm
lifetime	50,000hrs
build	die-cast aluminium, aluminium reflector
IP rating	IP65
warranty	5 years

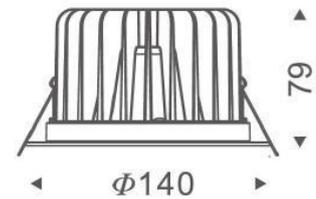

## product code

FV	-	A	-	25	-	x	-	50	-	x	-	W	-	R	
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting	
FV	Vue	A	ARIO	25	25W	Do	non-dim	50	50°	30	3000K	W	white	R	recessed
						D1	1-10V			40	4000K				
						DD	DALI								
						CS	Casambi								



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# boxy

## downlight family




the boxy is the architectural downlight or pendant with real punch. An internal aluminium faceted reflector provides a high efficacy which is eased out of the luminaire through a low-glare fresnel diffuser. Multiple sizes and wattage suit low to high ceilings and the ability to surface mount or suspend the luminaires lends this to any commercial space.



### family specifications

	boxy 12W	boxy 25W	boxy 35W
system wattage	12W	25W	35W
CCT	3000K, 4000K	3000K, 4000K	3000K, 4000K
luminaire output	1330Lm (12W)	2750Lm (25W)	3850Lm (35W)
beam angles	80°	80°	90°
CRI	Ra80	Ra80	Ra80
dimming	various profiles	various profiles	various profiles
lifetime	50,000hrs	50,000hrs	50,000hrs
IP rating	IP44 (Front)	IP44 (Front)	IP44 (Front)
warranty	5 years	5 years	5 years

### dimensional drawings

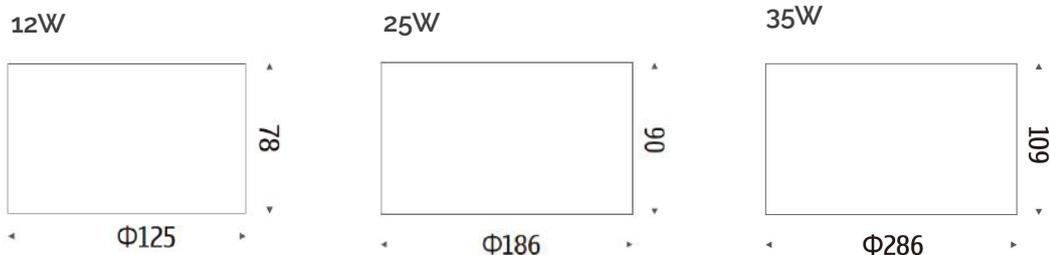

### product code

FV	-	B	-	x	-	x	-	x	-	x	-	W	-	x	
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting	
FV	vue	B	boxy	12	12W	Do	non-dim	80	80°	30	3000K	W	white	SM	surface mount
				25	25W	D1	1-10V	90	90°	40	4000K			S	suspended
				35	35W	DD	DALI								
						CS	Casambi								



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au




# teso basic 15W

teso series



the teso basic series is suitable for commercial and retail applications. The clean lines of a track-recessed driver provides a clean minimalist look. And being only 52mm in diameter the Teso Basic has a low aesthetic impact. High CRI and a tight colour consistency provides a high quality lighting result to compliment any architectural project.

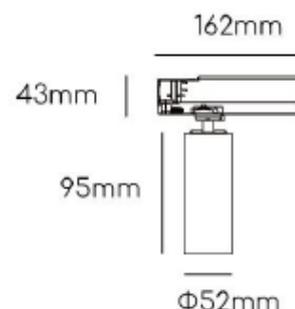

## specifications

system wattage	15W
CCT	2700K, 3000K, 3500K, 4000K
luminaire output	nominal 810lm delivered
beam angles	15°, 25°, 40°, 60°
CRI	90
R9	50
Macadam	3 SDCM
control	on/off, DALI
track	3 circuit
lifetime	50,000hrs
build	die-cast aluminium & PC lens
IP rating	IP20
warranty	5 years
colours	black and white



## product code

<b>FT</b>	-	<b>B</b>	-	<b>15</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>T</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FT</b> teso		<b>B</b> basic		<b>15</b> 15W		<b>D0</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI		<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>T</b> track



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# teso basic 26W




## teso series

the teso basic series is suitable for commercial and retail applications. The clean lines of a track-recessed driver provides a clean minimalist look. And being only 52mm in diameter the Teso Basic has a low aesthetic impact. High CRI and a tight colour consistency provides a high quality lighting result to compliment any architectural project.

### specifications

system wattage	26W
CCT	2700K, 3000K, 3500K, 4000K
luminaire output	nominal 1200lm delivered
beam angles	15°, 25°, 40°, 60°
CRI	90
R9	50
Macadam	3 SDCM
control	on/off, DALI
track	3 circuit
lifetime	50,000hrs
build	die-cast aluminium & PC lens
IP rating	IP20
warranty	5 years
colours	black and white

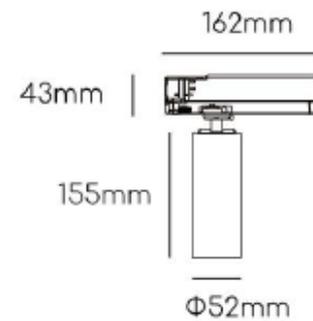

### product code

FT	-	B	-	26	-	x	-	x	-	x	-	x	-	T	
product group		group destination		wattage		dimming		beam angle		cct		fixture colour		mounting	
FT	teso	B	basic	26	26W	D0	non-dim	15	15°	27	2700K	W	white	T	track
						D1	1-10V	25	25°	30	3000K	B	black		
						D2	TRIAC	40	40°	35	3500K				
						DD	DALI	60	60°	40	4000K				




customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# teso pro

## teso series

the teso pro range takes commercial and retail applications to the next step. The clean lines of a track-recessed driver provides a clean minimalist look. And being only 52mm in diameter the Teso Pro has a low aesthetic impact. High CRI and a tight colour consistency provides a high quality lighting result to compliment any architectural project plus the Pro has an option for a wireless controlled adjustable beam angles.

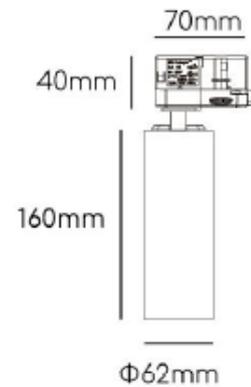

### specifications

<b>system wattage</b>	21W		
<b>CCT</b>	2700K, 3000K, 3500K, 4000K		
<b>luminaire output</b>	nominal 1100lm delivered		
<b>beam angles</b>	15°, 25°, 40°, 60°		
<b>CRI</b>	90		
<b>R9</b>	50		
<b>Macadam</b>	3 SDCM		
<b>control</b>	on/off, DALI, Casambi		
<b>track</b>	3 circuit		
<b>lifetime</b>	50,000hrs		
<b>build</b>	die-cast aluminium & PC lens		
<b>IP rating</b>	IP20		
<b>warranty</b>	5 years		
<b>colours</b>	black and white		
<b>accessories</b>	honeycomb louvre frosted lens clear lens snoot	<b>options</b>	manual or casambi controlled adjustable beam



### product code

<b>FT</b>	-	<b>P</b>	-	<b>21</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>T</b>
product group		group destination		wattage		dimmable		beam angle		cct		fixture colour		mounting
<b>FT</b> teso		<b>P</b> pro		<b>21</b> 21W		<b>Do</b> non-dim <b>D1</b> 1-10V <b>D2</b> TRIAC <b>DD</b> DALI <b>CS</b> Casambi		<b>15</b> 15° <b>25</b> 25° <b>40</b> 40° <b>60</b> 60°		<b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K		<b>W</b> white <b>B</b> black		<b>T</b> track




**customer service**  
+61 (03) 9790 8999  
verbatimlighting.com.au




# surface mount

## track accessories



	black	white
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 1M FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 2M FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 3M	FTTSB1 FTTSB2 FTTSB3	FTTSW1 FTTSW2 FTTSW3

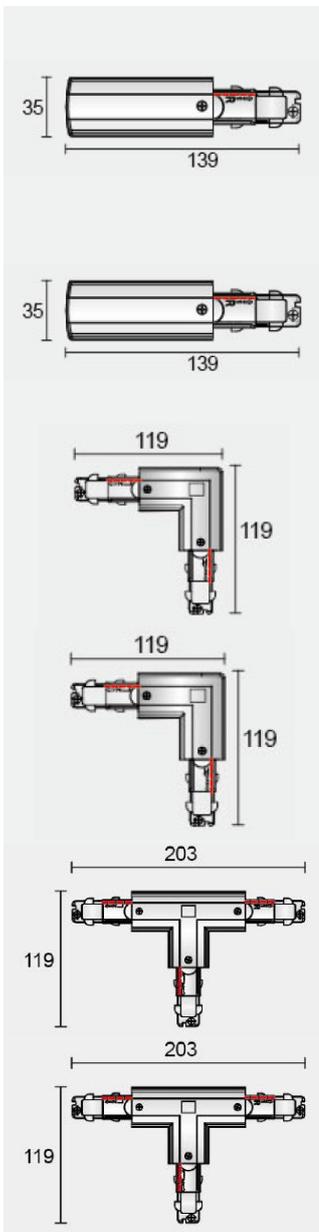

	black	white
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI FEEDER RIGHT	FTTSBFR	FTTSWFR
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI FEEDER LEFT	FTTSBFL	FTTSWFL
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'L' CONNECTOR LEFT	FTTSBLL	FTTSWLL
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'L' CONNECTOR RIGHT	FTTSBLR	FTTSWLR
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'T' CONNECTOR RIGHT 1	FTTSBTR1	FTTSWTR1
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'X' CONNECTOR	FTTSBX	FTTSWX




customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# surface mount

track accessories

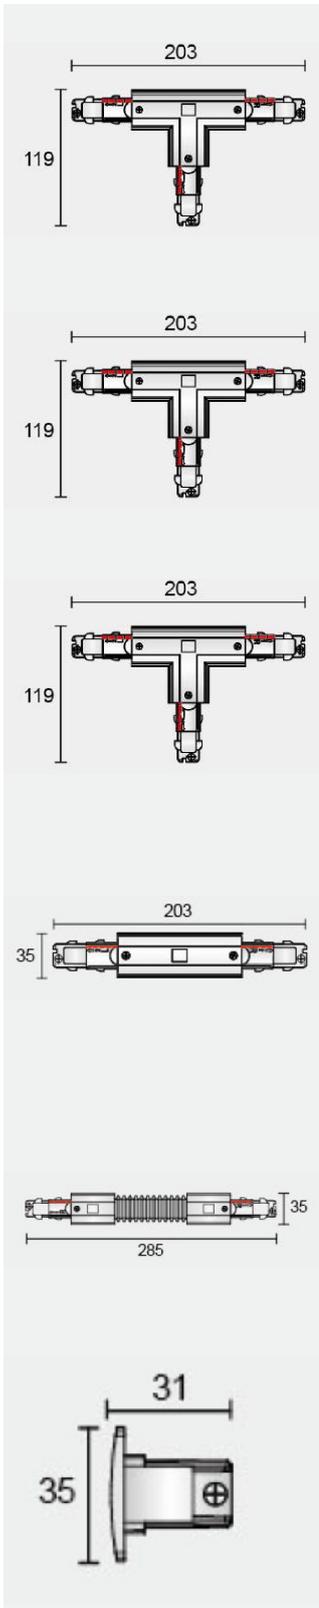

	black	white
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'T' CONNECTOR RIGHT 2	FTTSBTR2	FTTSWTR2
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'T' CONNECTOR LEFT 1	FTTSBTL1	FTTSWTL1
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI 'T' CONNECTOR LEFT 2	FTTSBTL2	FTTSWTL2
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI STRAIGHT CONNECTOR	FTTSBS	FTTSWS
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI FLEXIBLE CONNECTOR	FTTSBF	FTTSWF
FORLITE TESO TRACK SURFACE MOUNT 3 PHASE DALI CONCEALED CONNECTOR	FTTSBC	FTTSWC




**customer service**  
 +61 (03) 9790 8999  
 verbatimlighting.com.au




# recessed mount

track accessories



	black	white
FORLITE TESO TRACK RECESSED MOUNT 3 PHASE DALI 1M FORLITE TESO TRACK RECESSED MOUNT 3 PHASE DALI 2M FORLITE TESO TRACK RECESSED MOUNT 3 PHASE DALI 3M	FTTRB1 FTTRB2 FTTRB3	FTTRW1 FTTRW2 FTTRW3

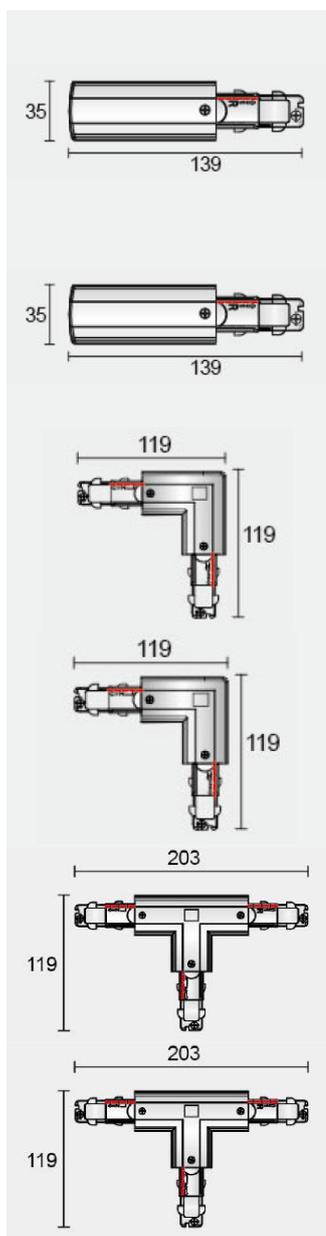

	black	white
FORLITE TESO TRACK RECESSED 3 PHASE DALI FEEDER RIGHT	FTTRBFR	FTTRWFR
FORLITE TESO TRACK RECESSED 3 PHASE DALI FEEDER LEFT	FTTRBFL	FTTRWFL
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'L' CONNECTOR LEFT	FTTRBLL	FTTRWLL
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'L' CONNECTOR RIGHT	FTTRBLR	FTTRWLR
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'T' CONNECTOR RIGHT 1	FTTRBTR1	FTTRWTR1
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'X' CONNECTOR	FTTRBX	FTTRWX




customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



# recessed mount

track accessories

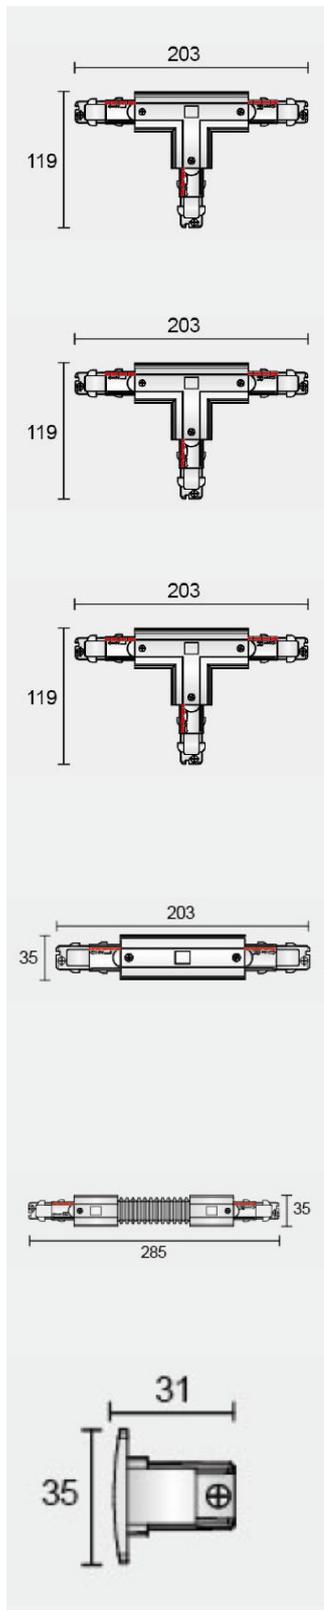

	black	white
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'T' CONNECTOR RIGHT 2	FTTRBTR2	FTTRWTR2
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'T' CONNECTOR LEFT 1	FTTRBTL1	FTTRWTL1
FORLITE TESO TRACK RECESSED 3 PHASE DALI 'T' CONNECTOR LEFT 2	FTTRBTL2	FTTRWTL2
FORLITE TESO TRACK RECESSED 3 PHASE DALI STRAIGHT CONNECTOR	FTTRBS	FTTRWS
FORLITE TESO TRACK RECESSED MOUNT 3 PHASE DALI CONCEALED CONNECTOR	FTTRBC	FTTRWC
FORLITE TESO TRACK ENDCAP 3 PHASE DALI	FTTBE	FTTWE



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au





# artere

flexible strip light



flexible linear systems for either single-source or pixel control, the Artere can conform to the angles and curves of architectural elements and either provide subtle white light or creative lighting effects with the use of RGBW or coloured pixel designs.

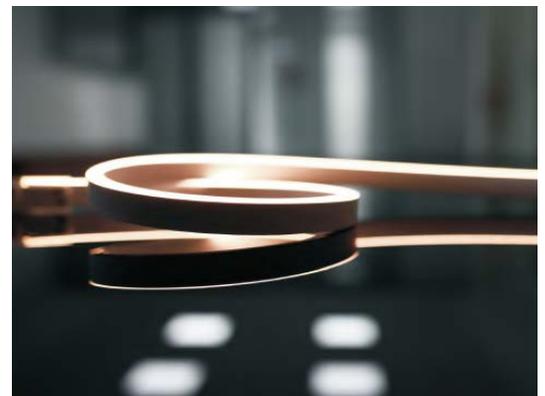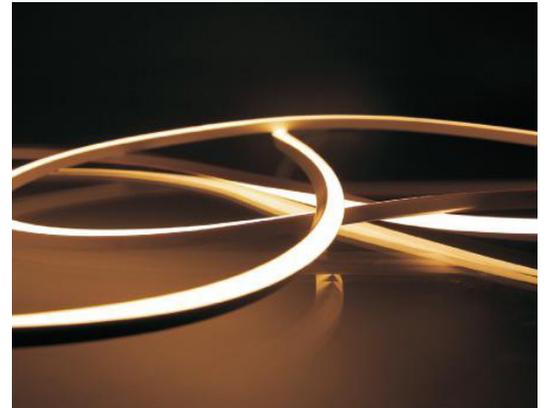


## family specifications


system wattage	4.5W single colour, 15W RGBW
CCT	3000K, 4000K, RGBW, tuneable white (artere 1010 not available in RGBW)
luminaire output	up to 140Lm (4.5W)
beam angles	120°
CRI	Ra80
control	non-dim, DALI or Casambi
lifetime	50,000hrs
IP rating	IP68
warranty	5 years

## dimensional drawings


artere 1010

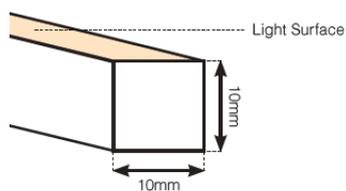

artere 1617

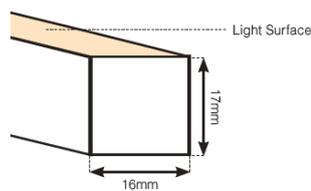

artere 1121

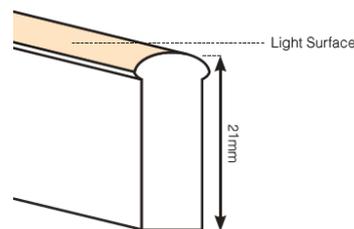

## product code

<b>FA</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>	-	<b>x</b>
product group		size		dimmable		cct		length
<b>FA</b> artere		<b>1010</b> 10x10mm		<b>Do</b> non-dim		<b>30</b> 3000K		<b>x</b> length
		<b>1617</b> 16x17mm		<b>DD</b> DALI		<b>40</b> 4000K		in metres
		<b>1121</b> 11x21mm		<b>CS</b> Casambi		<b>RGB</b> RGB		
						<b>TW</b> tuneable white		



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au



## types of connectors

### 1. injection-moulded connector




**injection-moulded front connector (bottom)**

Connection to power supply via a pre-installed bottom feed cable. IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**injection-moulded front connector (side)**

Connection to power supply via a pre-installed side feed cable IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.

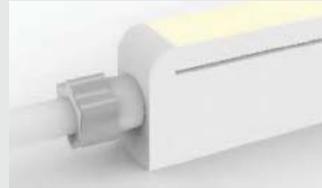

**injection-moulded front connector (end)**

Connection power supply via a pre-installed end feed cable IP67. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**injection-moulded end cap**

Pre-installed end cap. IP67.

### 2. dual injection-moulded connector



**dual injection-moulded front connector (bottom)**

Connection to power supply via a pre-installed bottom feed cable. IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**dual injection-moulded front connector (side)**

Connection to power supply via a pre-installed side feed cable IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**dual injection-moulded front connector (end)**

Connection power supply via a pre-installed end feed cable IP68. Cable length available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**dual injection-moulded end cap**

Pre-installed end cap. IP68.

### 3. snap connector



**snap front connector (top end)**

Connection to power supply via a DIY front connector. IP67. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**snap front connector gside right/left**

Connection to power supply via a DIY Connector. IP67. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**snap front connector (bottom)**

Connection to power supply via a DIY Connector. IP67. Cable available in 0.3m, 1m, 3m, 5m, 10m, 15m & 20m lengths.



**snap end cap**

DIY installed endcap. IP67.

# ligne-micro

linear micro extrusion



matching miniature extrusion with quality LED boards and strips, the ligne-micro is a quality option for architectural effect lighting. Suited to retail, board-rooms or break-out spaces, the lighting designer can play with light by hiding the light source in architectural elements




## family specifications


Wattages	4W, 8W, 12W, 16W
CCT	2700K, 3000K, 4000K, 6500K
luminaire output	from 600Lm to 2,500Lm
beam angle	110°
CRI	Ra80 or Ra90
lifetime	50,000hrs
IP rating	IP20
warranty	5 years

## dimensional drawings


ligne 1616D




ligne 1708D



ligne 1715S



ligne 3535S



## product code

FLM	-	x	-	x	-	x	-	x	-	SM			
product group		wattage		dimmmable		cct		fixture colour		length		mounting	
FLM	ligne-micro	4	4W	Do	non-dim	27	2700K	W	white	x	length in metres	SM	surface mount
		8	8W	D1	1-10V	30	3000K	S	silver				
		12	12W	DD	DALI	40	4000K	B	black				
		16	16W	CS	Casambi	65	6500K						



customer service  
+61 (03) 9790 8999  
verbatimlighting.com.au





## contact

**address:** Unit 6, 450 Princes Highway,  
Noble Park, VIC 3174

**phone:** +61 (03) 9790 8999

**fax:** +61 (03) 9790 8911

**email:** [lighting.orders@verbatim.com.au](mailto:lighting.orders@verbatim.com.au)