



- Replaces traditional Twin T8 fluorescent fittings
- High quality diffuser for uniform light distribution
- High efficacy, 130lm/W
- Flicker-free
- Lifetime of 50000 hrs
- 4000/5000/6000K CCT Changeable
- 110° beam angle
- Surface mount and suspended installation accessories available
- Includes 1.2m Australian approved cable and plug

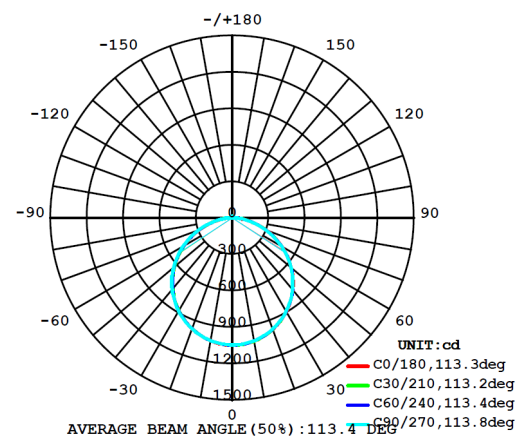

Order Code	66624
General Data	
Lamp Base	N/A
Design	PMMA Lens with PS Diffuser
Geometric Data	
Height (mm)	295mm
Diameter (mm)	1195mm
Cut-Hole (mm)	1195x295mm
Weight (g)	2070g
Electric Data	
Wattage	24W
Voltage	220-240V
Power Factor	0.9
Operating Frequency	50 or 60Hz
Photometric Data	
Total Luminous Flux (lm)	3100 lm
CRI	80
CCT	4000/5000/6000K – CCT Changeable
Luminous Intensity (cd)	TBC
Beam Angle (°)	110°
Lifetime(L70)	50000 hrs
Operating Temperature	-20 to 40°C

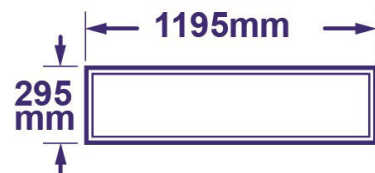