

ario gen2


vue series

the ario gen 2 IP65 is an architectural revelation as an exterior IP-rated downlight. medium sized and IP65 from top and bottom, the ario is bug-resistant and attractive. the use of a multi-faceted reflector reduces glare and night-blindness by hiding the direct view of the light source.

the ario gen 2 is supplied with a remote driver (IP20 unless otherwise requested).

specifications

system wattage:	26W
luminaire output:	2230lm
CCT:	2700K, 3000K, 4000K, 5000K
optics:	12°, 22°, 36°, 60°
CRI:	80
control:	non-dim, 1-10V, Triac, DALI, Casambi
operating voltage:	240Vac
finish:	white & black, powdercoat finish
housing:	die-cast aluminium, high purity anodised aluminium reflector
diffuser:	clear glass
enclosure protection:	IP65
operating temp:	25°C
lifetime:	50,000hrs
warranty:	5 years
accessories:	N/A

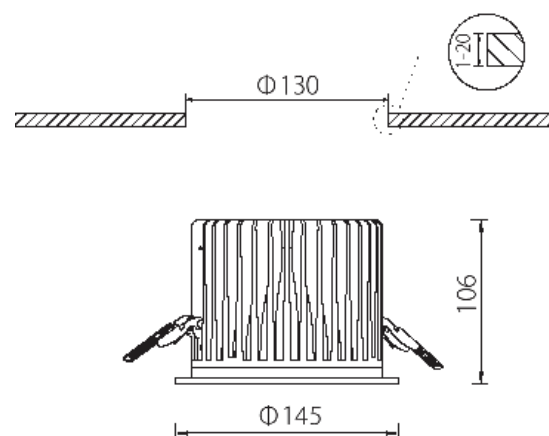

product code

product group	group designation	wattage	dimmmable	optics	cct	fixture colour	mounting
FR	A	26	X	X	X	X	R
FV	A	26	Do non-dim	12 12°	27 2700K	B black	R recessed
			D1 1-10V	22 22°	30 3000K	W white	
			D2 Triac	36 36°	40 4000K		
			DD DALI	60 60°	50 5000K		
			CS Casambi				