

silver L

vue series




a high wattage solution suitable for high ceilings in open areas. a specular aluminium reflector minimises glare and the high CRI and tight colour consistency provides a maintained high quality light throughout the lifetime of the project.



specifications

system wattage:	34W, 51W, 85W
luminaire output:	3148lm, 7938lm
CCT:	2700K, 3000K, 3500K, 4000K
optics:	40°, 60°
CRI:	90
control:	non-dim, 1-10V, Triac, DALI, Casambi
operating voltage:	240Vac
finish:	white, black
housing:	die-cast aluminium, AL reflector
diffuser:	high transparency optical lens
enclosure protection:	IP20/IP44
operating temp:	25°C
lifetime:	50,000hrs
warranty:	5 years
accessories:	honeycomb filter, clear lens, frosted lens

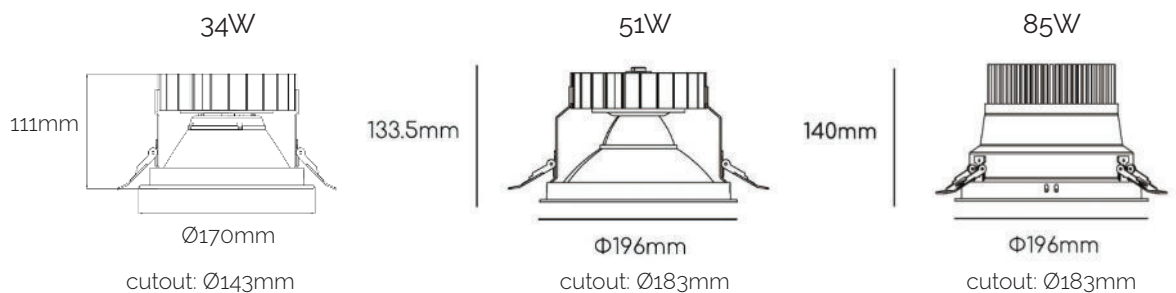

product code

product group	group designation	wattage	dimmable	beam angle	cct	fixture colour	mounting
FV vue	SL silver L	34 34W 51 51W 85 85W	Do non-dim D1 1-10V D2 TRIAC DD DALI CS Casambi	40 40° 60 60°	27 2700K 30 3000K 35 3500K 40 4000K	W white B black	R recessed



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au

