



Commercial & Industrial

LED Lighting Solutions











www.verbatimlighting.com.au



sales@verbatimlighting.com.au



CLEANROOM IP65

-  23W, 30W or 40W options
-  1200x300 or 600x600
-  L80B10 – >100,000hrs
-  HiColour CRI90
-  Cyanosis compliant
-  MacAdam 3 SDCM
-  5 year warranty
-  Textured low-glare diffusing medium










- Full gasketing between ceiling and frame ensure a secure fit.
- Firm out-reach installation mounts on the main body
- 295mm W x 1195mm L x 90mm D



APPLICATIONS
Laboratories
Clean Areas



NOVABLADE G3

-  23W, 30W or 40W options
-  1200x300, 600x600, 600x300
-  1-10v, DALI, or Casambi control
-  L80B10 – >75,000hrs
-  HI-Colour CRI90
-  Cyanosis compliant
-  MacAdam 3 SDCM
-  7 year warranty
-  Micro-prismatic diffuser
-  Tuneable white available



APPLICATIONS
Offices



Based on a 400sqm typical office space

SPACING	WATTAGE	AVERAGE LUX	GLARE RATING	W/SQM/100lx	UNIFORMITY
2.4m x 2.4m	22.8W	355lx	18.7	1.03	.63
2.4m x 2.7m	22.8W	325lx	18.2	1.12	.67










NOVABLADE G3

Specification





NOVALED MAXI M6

-  12W or 22W
-  IP44 with low-glare satin diffuser
-  90 CRI and COI compliant as standard (4K)
-  LM80 - >100,000hrs
-  7 year Warranty (see terms)
-  1-10V or Dali available from stock – Casambi on request.
-  Flicker Free
-  165mm or 240mm diameter trim
-  45W optional in M8



M8
240mm | 12W or 22W












M6
165mm | 12W or 22W



APPLICATIONS
Corridors, Offices,
Bathrooms, Kitchens,
Reception areas










NOVALED DECOR PLUS

-  8W or 12W
-  Low-glare housing
-  90 CRI
-  LM80 - >100,000hrs
-  7 year Warranty (see terms)
-  IP40 with IP44 trim available
-  Phase-dim or Dali available from stock – Casambi on request.
-  Flicker Free
-  ~90mm cutout



APPLICATIONS
Corridors, Offices,
Bathrooms, Kitchens,
Reception areas

LINEAR-Q RANGE

-  Selectable wattage ~15W or 30W
-  Selectable CCT – 4000k, 5000k, or 6000k
-  Emergency option available
-  Sensor option available
-  7 year warranty
-  L-Q Weather-proof option is certified HACCP
-  L-Q Tough supplied with anti-tamper screws including for the mounting clips



Linear-Q Weatherproof
IK08 - IP65

Linear-Q Tough
IK10 - IP66



Linear-Q Weatherproof
IK08 - IP65

Linear-Q Tough
IK10 - IP66










APPLICATIONS
Back of house
Carparks, Awnings



NERI

ANTARES

-  2,500lm up to 18,00lm
-  Standard CCT options of 3000k or 4000k, 2200k or 2700k available
-  Nema or zhaga optional
-  120,000h L90B10 ($T_q = 25^{\circ}\text{C}$)
-  Maximum luminous intensity class $\gamma \geq 90^{\circ}$: $< 0.49 \text{ cd/klm}$
-  Tool-less entry and maintenance
-  IK08 – IP66



APPLICATIONS

Entrances
Carparks

NERI


ANTARES

Carparks

POLAR DIAGRAMS

Type II - A


Luminous intensity class G*4



CIE Flux code
N.1 N.2 N.3 N.4 N.5
40 72 96 100 100

Type III - A


Luminous intensity class G*3



CIE Flux code
N.1 N.2 N.3 N.4 N.5
40 73 96 100 100

Type III - D


Luminous intensity class G*4



CIE Flux code
N.1 N.2 N.3 N.4 N.5
37 72 96 100 100

Type IV- A

Luminous intensity class G*2



CIE Flux code
N.1 N.2 N.3 N.4 N.5
27 58 93 100 100

PCD Parking

Specialist optics to suit forward throw or side emission




Optic specifically for cross-walks
for accurate and even illuminance

Solutions for ramps & pathways

NERI

ANTARES



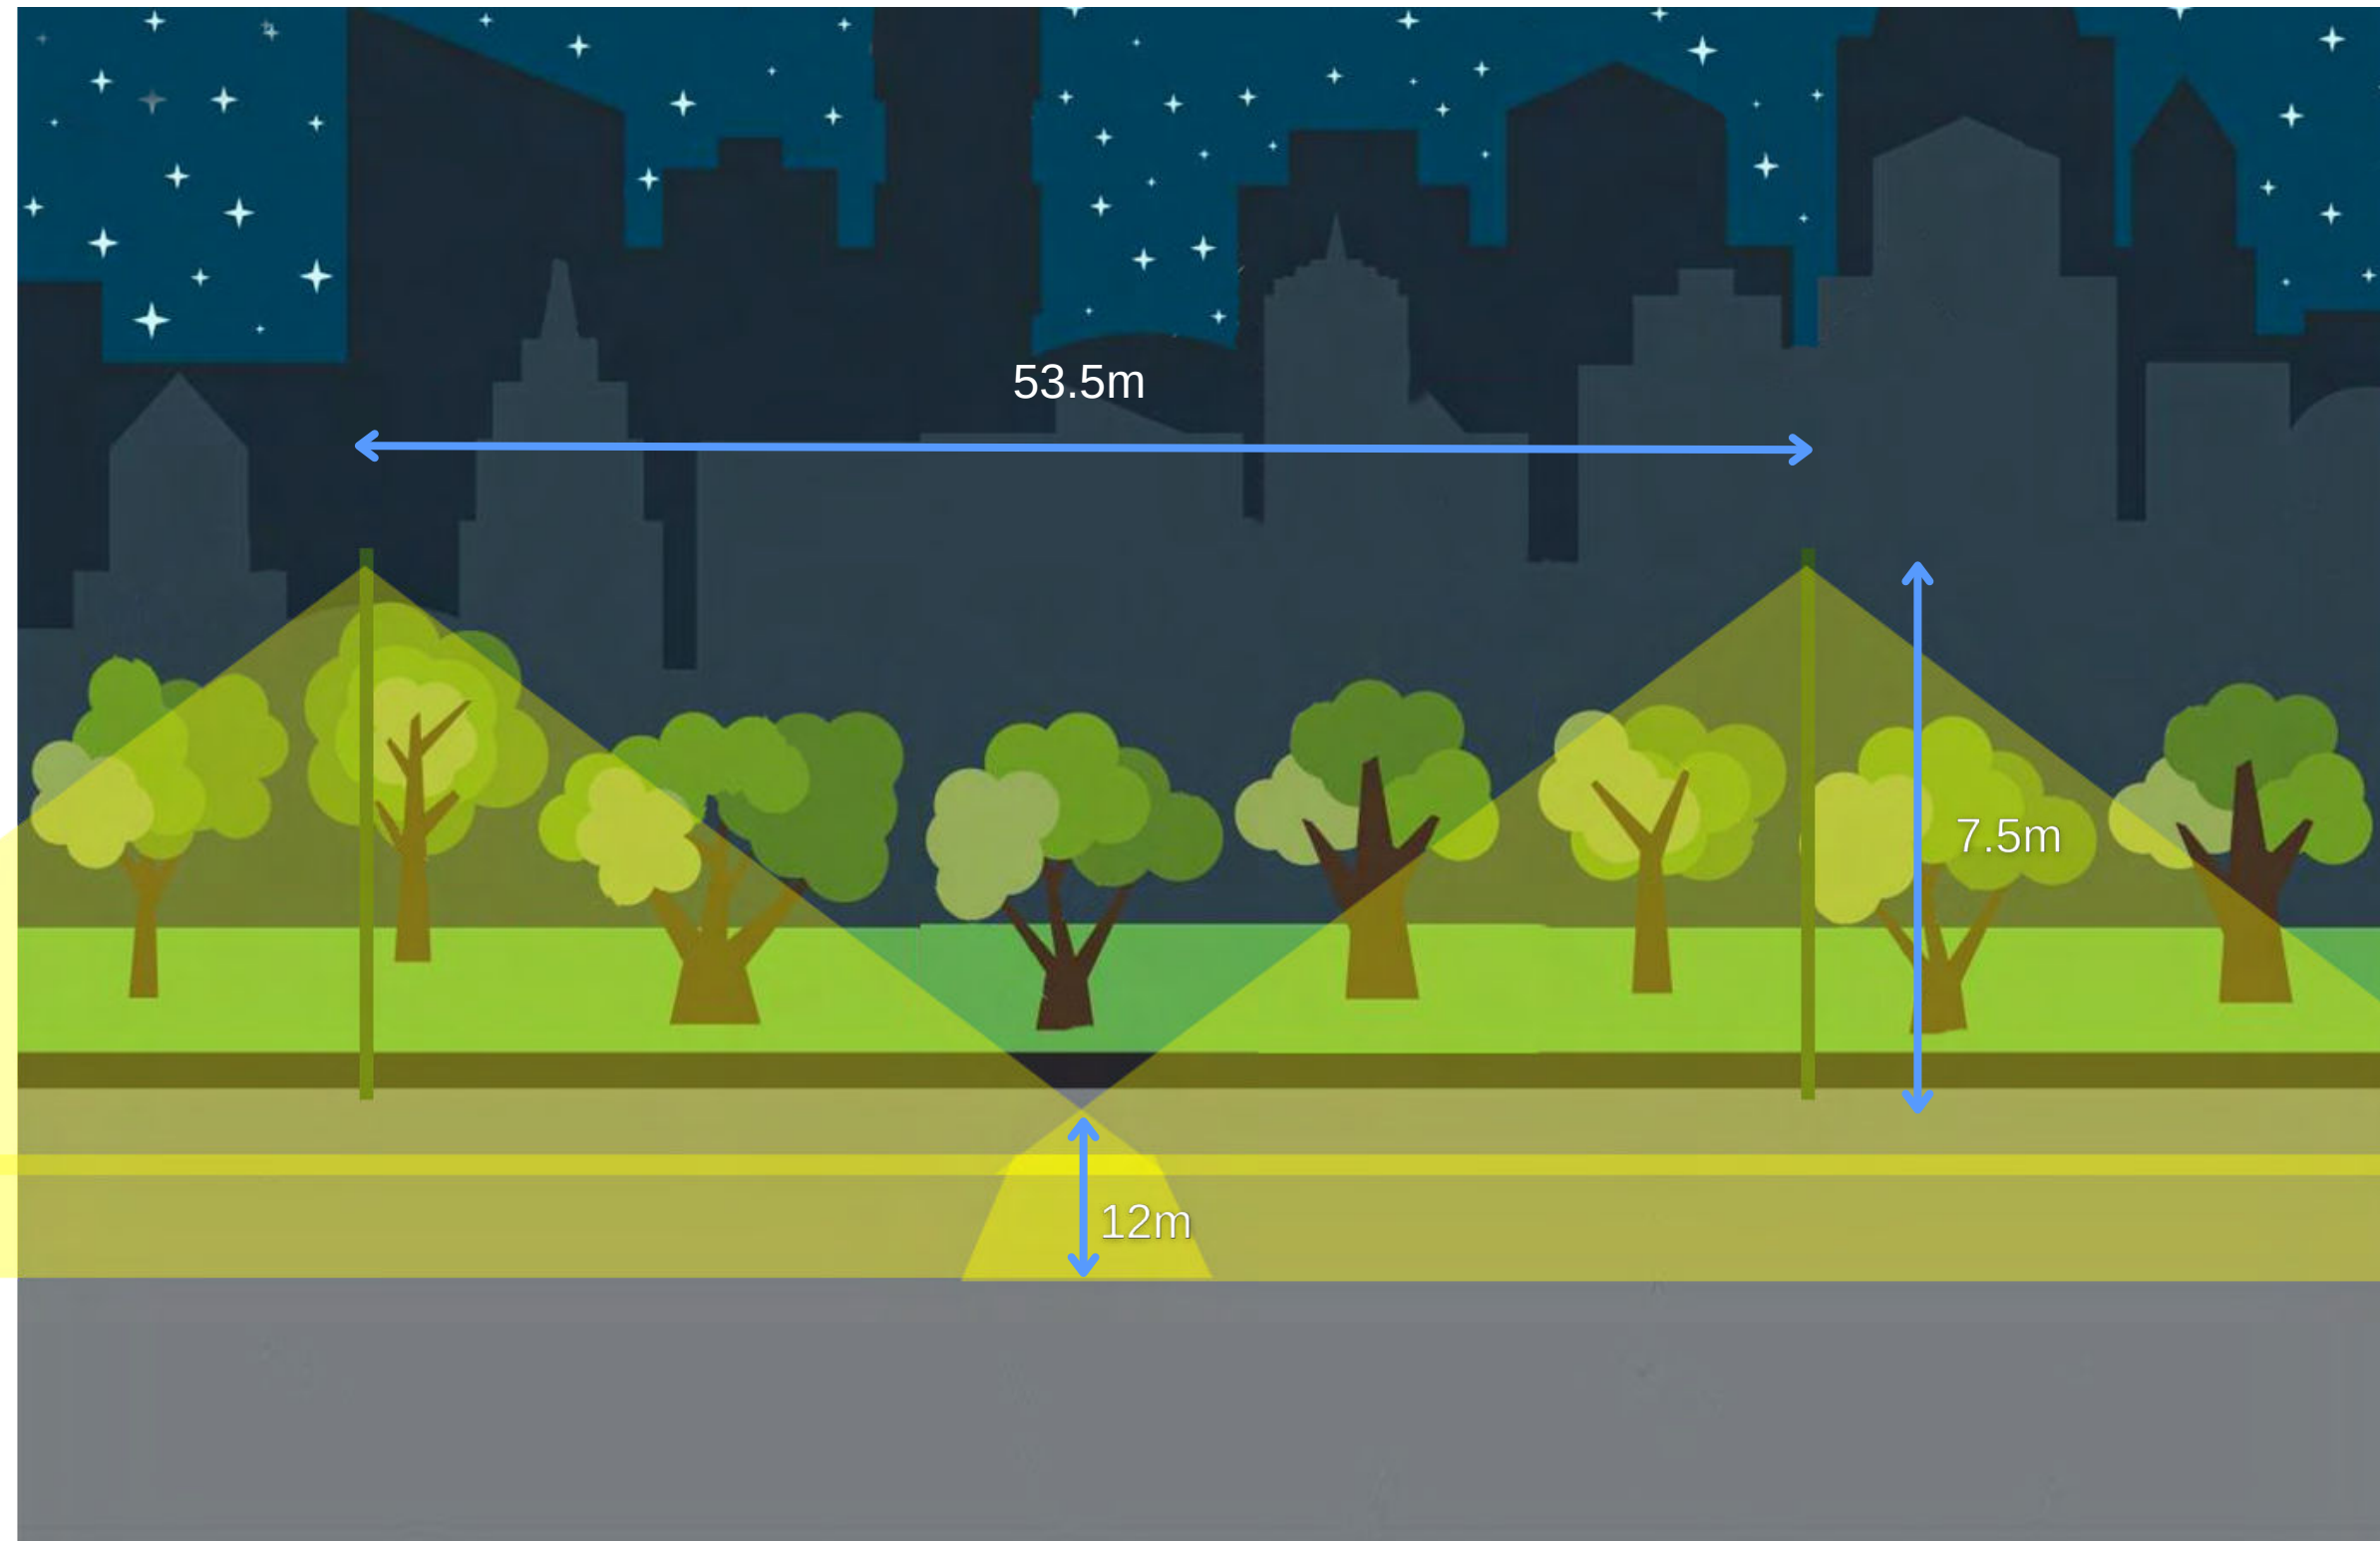







Type III-D
Roadway Spacing



Category: PR3
Avg illuminance >1.75lx
Min Illuminance >0.3lx
Illuminance Uniformity <8



NOVALINE LINEAR TRUNKING

-  35W, 55W
-  Low-cost, tool-less installation
-  Integrated 3-phase circuits
-  IP40
-  Tier 1 DALI drivers- advanced dimming options
-  Motion/daylight sensor accessory
-  T & L standard module node connectors
-  Suspended or surface mount options
-  Optional track module for track lighting
-  7 year warranty to 35,000hrs














APPLICATIONS

Supermarkets, Retail Stores,
Warehouses, Offices,
Galleries & Halls




NOVAPLAY HIGH MAST LIGHTING

-  100W up to 800W (Novaplay Wide)
-  1500W Metal Halide replacement
-  100,000+ lumens
-  Asymmetric full cutoff
-  Up to 130 lumens per watt
-  Integral 10KV surge protection
-  Simple installation & aiming
-  IP65
-  Easy Maintenance
-  7 year warranty

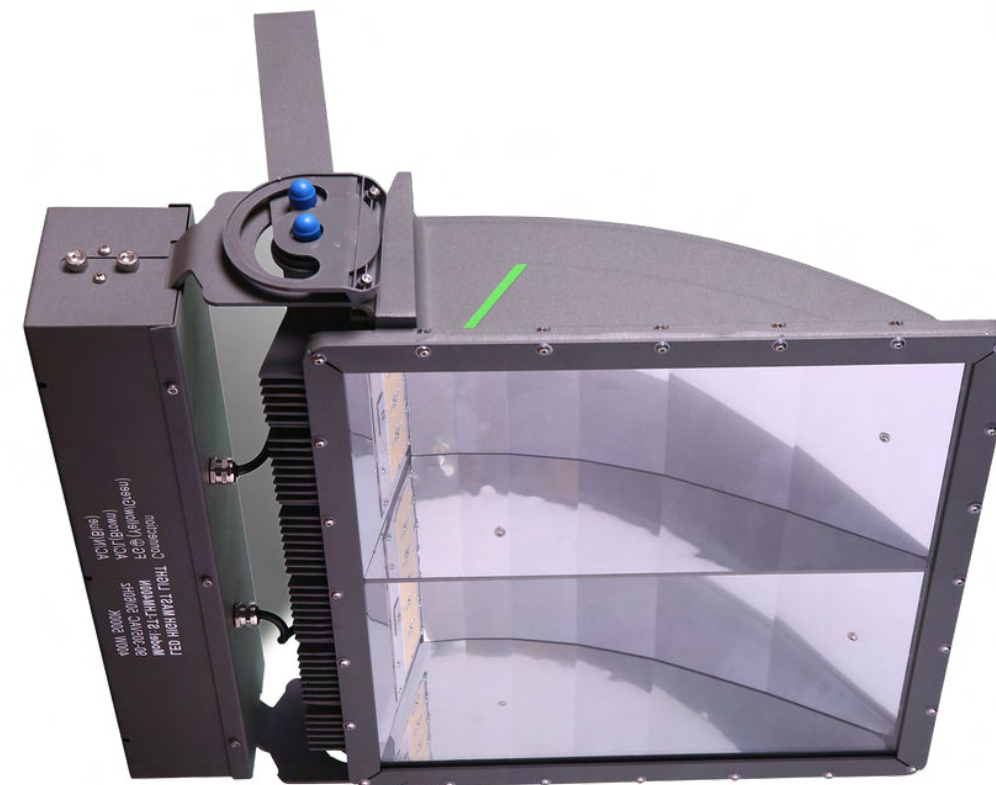

Novaplay 300/400W

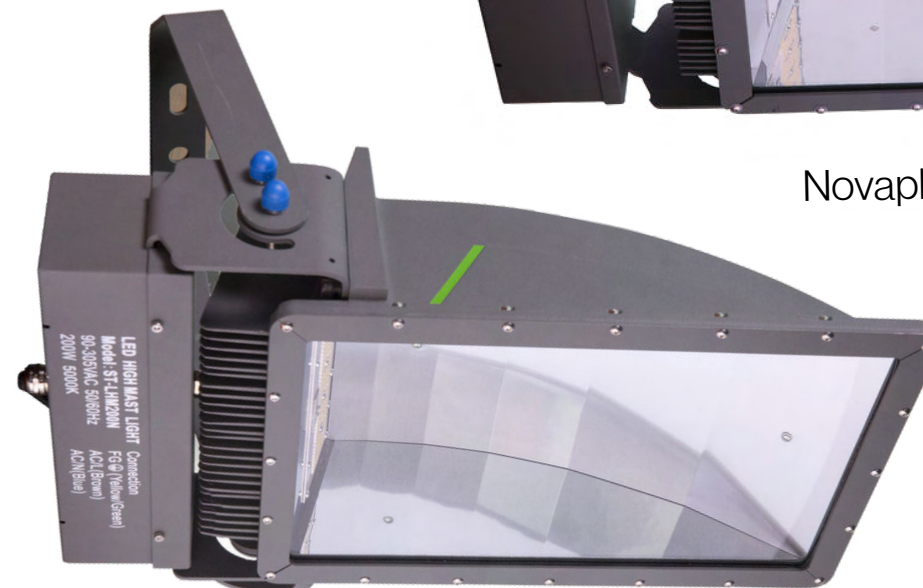

Novaplay 100/150/200W



Novaplay 500/600/800W












APPLICATIONS

Sporting facilities & stadium lighting, High mast roadway, Airport apron & security, Docks & ports, Industrial parking lots



SKYBAY GEN 4

-  80W up to 180W
-  175lm/W delivered
-  Possible to get to UGR24 with diffuser
-  IP65, IK08
-  DALI options available
-  Motion/daylight sensor accessory
-  Bluetooth mesh option available.
-  Full thermal control
-  7 year warranty to 35,000hrs



Aluminum Reflector



Low-glare diffuser



Surface mount
bracket accessory



Standard Skybay G4













APPLICATIONS

Ambulance Bays
Carpark Entrance,
Warehouses, etc



HALO BOLLARD

-  14W, 25W
-  Available in 2 sizes: halo 5 (475mm) & halo 10 (975mm)
-  Delivers 360 degrees of low glare illumination
-  Type 5 optics
-  IP66, IK10
-  DALI options available
-  Opal inner lens & clear outer lens
-  Supplied with integral or remote driver
-  Complete with ragbolt kit for secure installation
-  5 year warranty to 46,000hrs (L90)













APPLICATIONS

Public Spaces
Residential Walkways



MIGHTY BOLLARD

-  14W, 24W
-  Available in 2 sizes: mighty 500 (500mm) & might 900 (900mm)
-  Low glare illumination
-  Type 4 or Type 5 optics
-  IP66, IK10
-  DALI options available
-  Multi-optic PC lens
-  Concealed fixing plate & ragbolt kit for secure installation
-  5 year warranty to 50,000hrs
-  Visor accessory option



APPLICATIONS

Public Spaces
Residential Walkways



Urban &
Facade




Hotels &
Residential




Lighting Solutions for Any Space


Industry &
Infrastructure

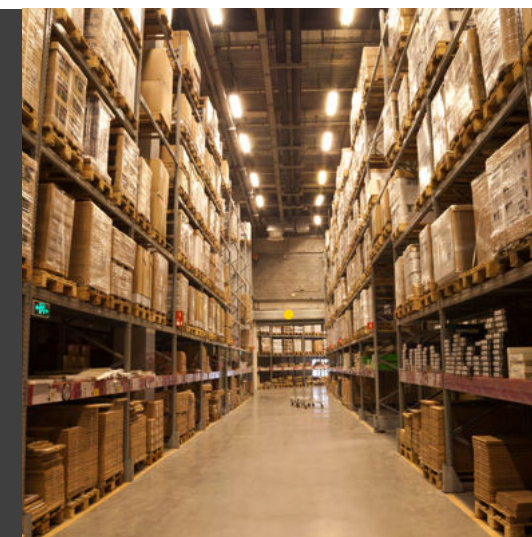

Education
& Sports

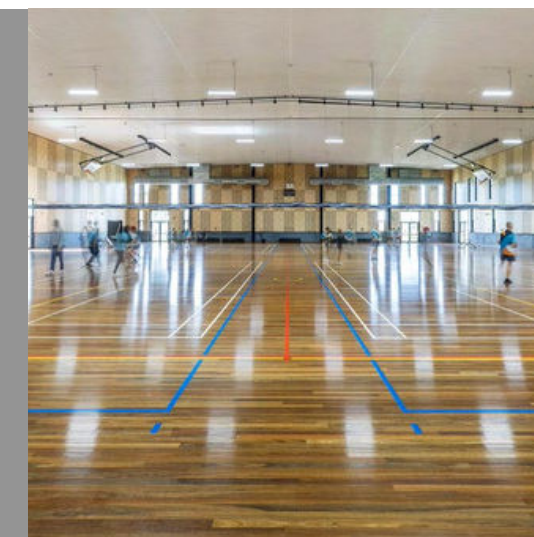


Offices

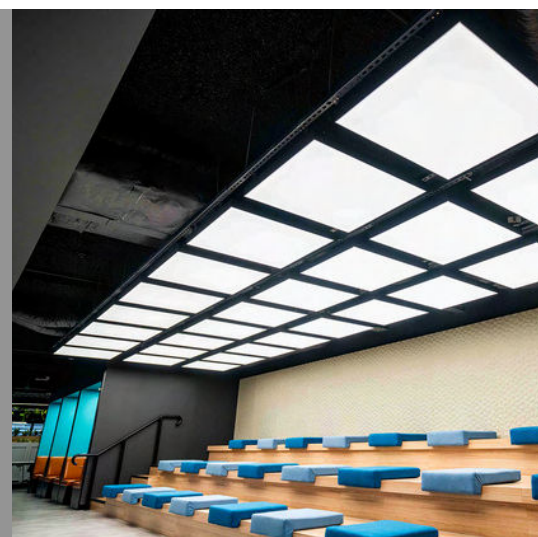

Streets &
Infrastructure



Retail

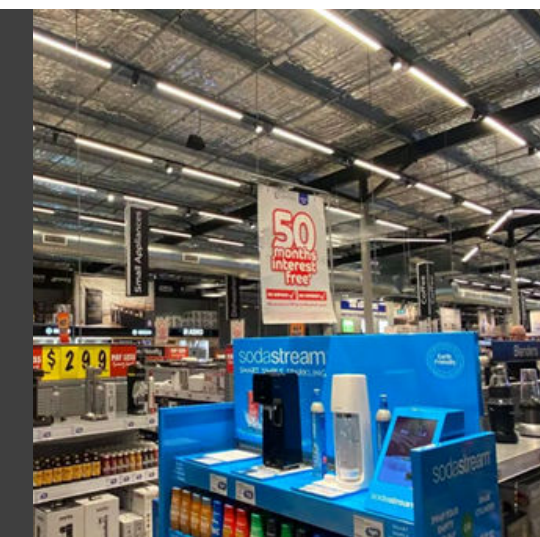



Commercial & Industrial

LED Lighting Solutions



www.verbatimlighting.com.au
sales@verbatimlighting.com.au