

float round

vue series



the float round series offers a minimalistic, low profile circular design suitable for large indoor spaces.

designed with a micro prismatic diffuser for low glare illumination available in a variety of sizes and lumen packages.

float round can be ceiling, wall mounted or suspended with the option of direct only or direct/indirect illumination.

specifications


system wattage:	see table below
luminaire output:	see table below
CCT:	3000K, 4000K
optics:	120° for direct
CRI:	>90
control:	fixed, triac, DALI or Casambi
operating voltage:	240Vac
finish:	white or black
housing:	aluminium
diffuser:	microprismatic
enclosure protection:	IP66, IK10
operating temp:	-20°C to +40°C
lifetime:	50,000hrs
warranty:	5 years
accessories:	N/A



wire suspended



surface-mount

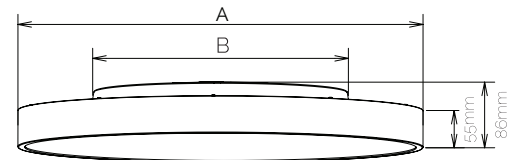

available in 4 sizes- refer to table for product dimensions

Watts (W)	Dimensions (mm)		Lumens (lm)
	A	B	
40	400	219	4300
60	600	383	6500
80	800	383	8600
100	1000	383	10800

product code

FV	FR	X	X	X	X	X	X
product group	group destination	distribution	size	dimnable	cct	fixture colour	mounting
FV vue	FR float round	D direct DI direct/indirect	1000 1000mm 800 800mm 600 600mm 400 400mm	Do non-dim D2 TRIAC DD DALI CS Casambi	30 3000K 40 4000K	W white B black	S surface PW pendant wire PR pendant rod



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au

